


# STUDIO 47" SOFA TABLE

## ASSEMBLY INSTRUCTION

Pg.1/2

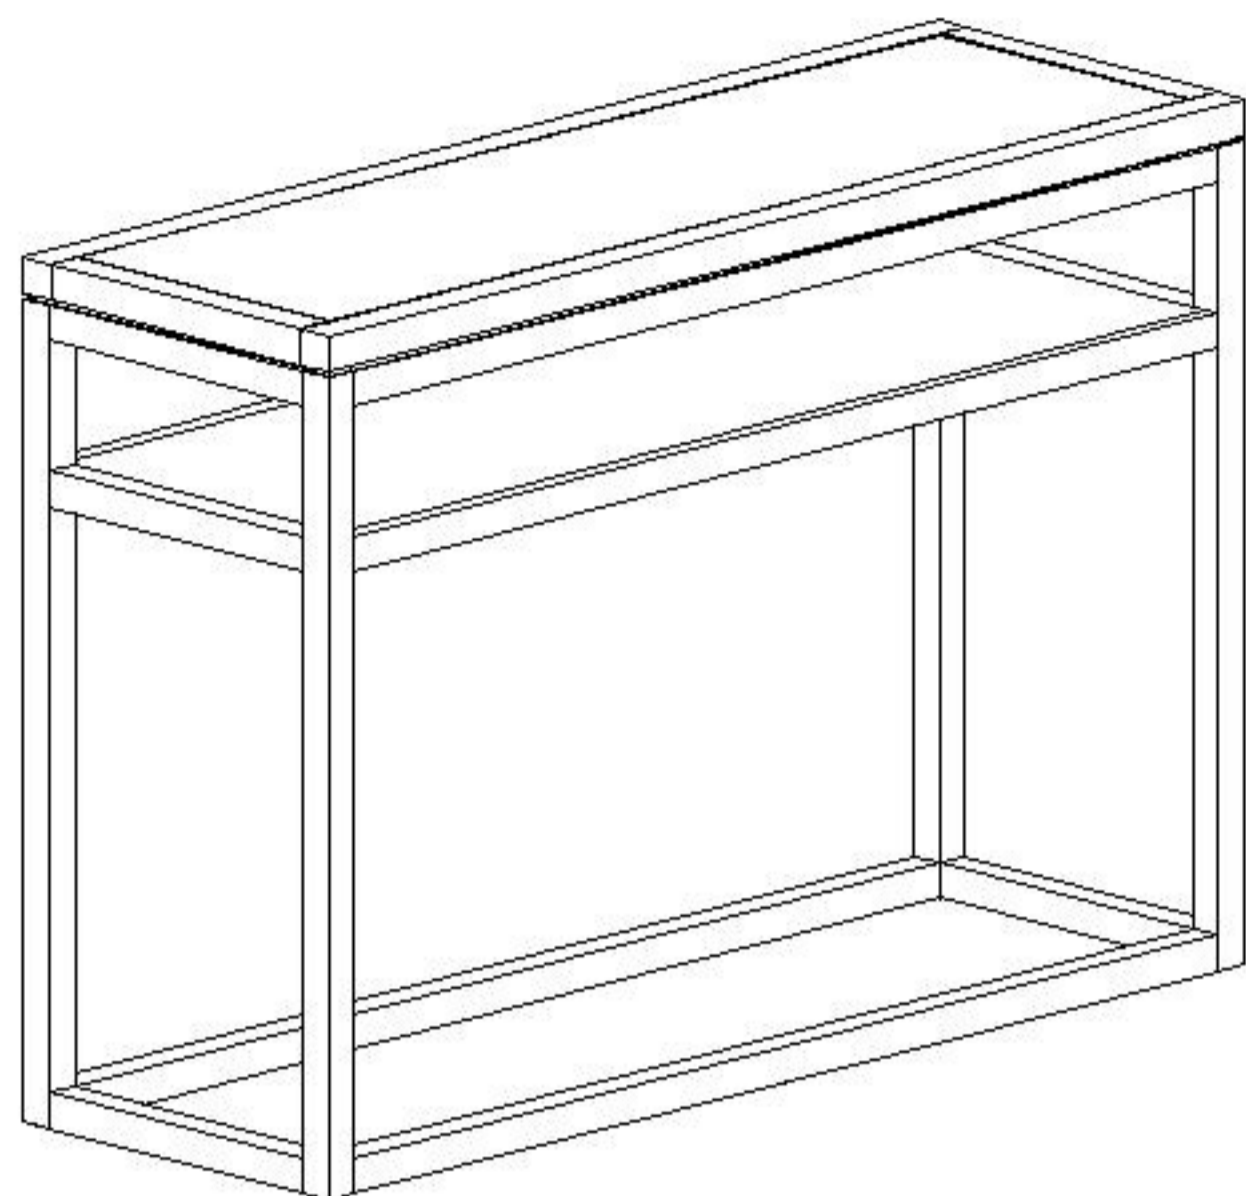

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts that may come loose inside the carton box during shipment.

### IMPORTANT


Please go through this assembly instruction before starting assembly. Kindly follow the sequence listed to assure fast, easy and correct assembly.

### CARE & MAINTENANCE







Wipe clean with soft cloth and furniture polish.

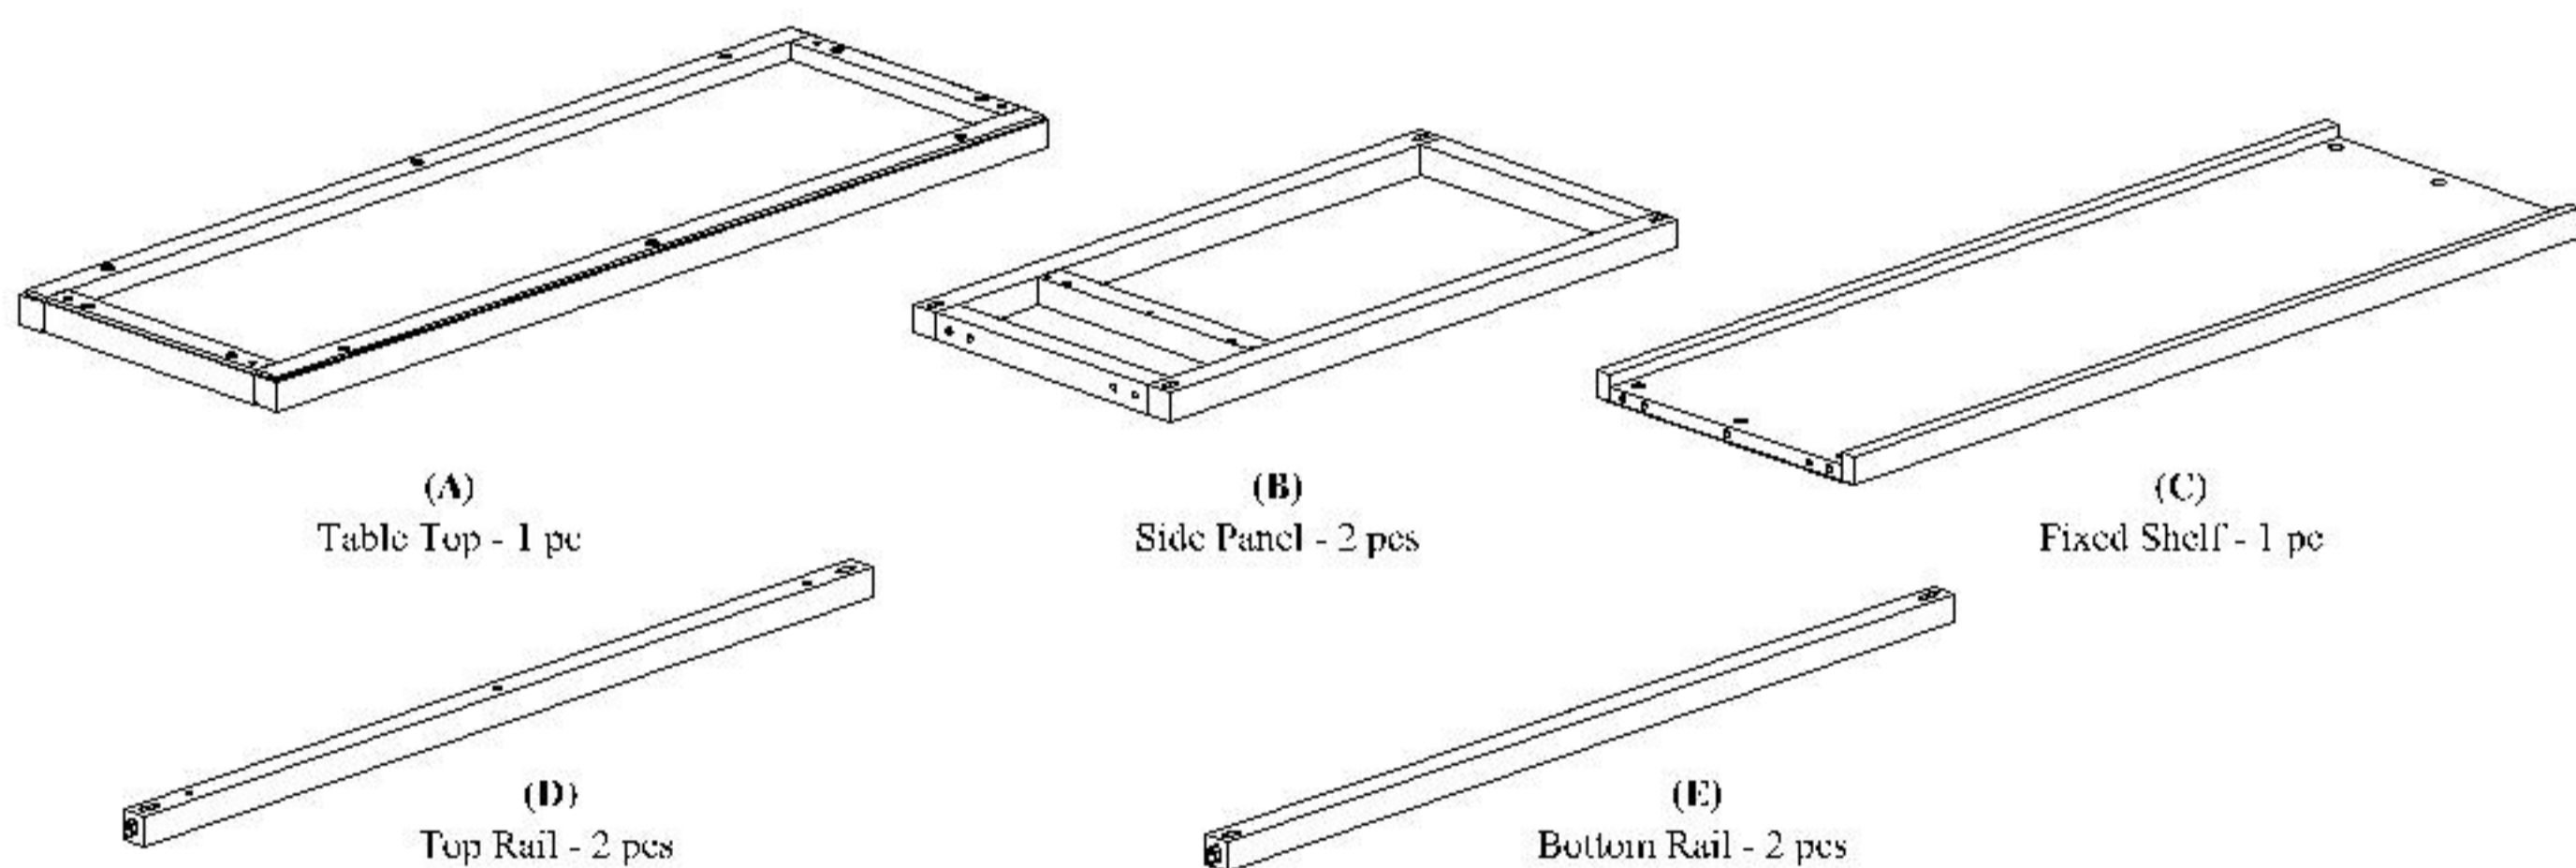**MADE IN MALAYSIA**

### PARTS LIST




### HARDWARE LIST

- |   |   |   |   |
|---|---|---|---|
|  |  |  |  |
| (1) Wooden Dowel - 8 pcs  | (2) M4x38mm Chipboard Screw - 8 pcs   | (3) Camlock Screw - 6 pcs   | (4) Camlock & Cap - 6 pcs   |
|  |  |   |   |
| (5) M6x40mm JCBC Screw - 10 pcs   | (6) 4mm Hex Wrench - 1 pc   |   |   |

Note: EXTRA hardwares are included

# STUDIO 47" SOFA TABLE


## ASSEMBLY INSTRUCTION

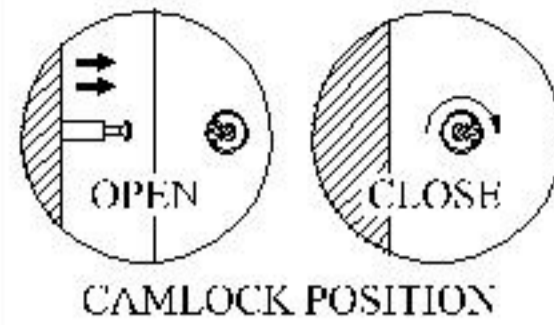

**1**



Insert Camlock Screw (3) into holes on **SIDE PANEL (B)**. Fully tighten Camlock Screw (3) using Philips Head Screwdriver.

**2**

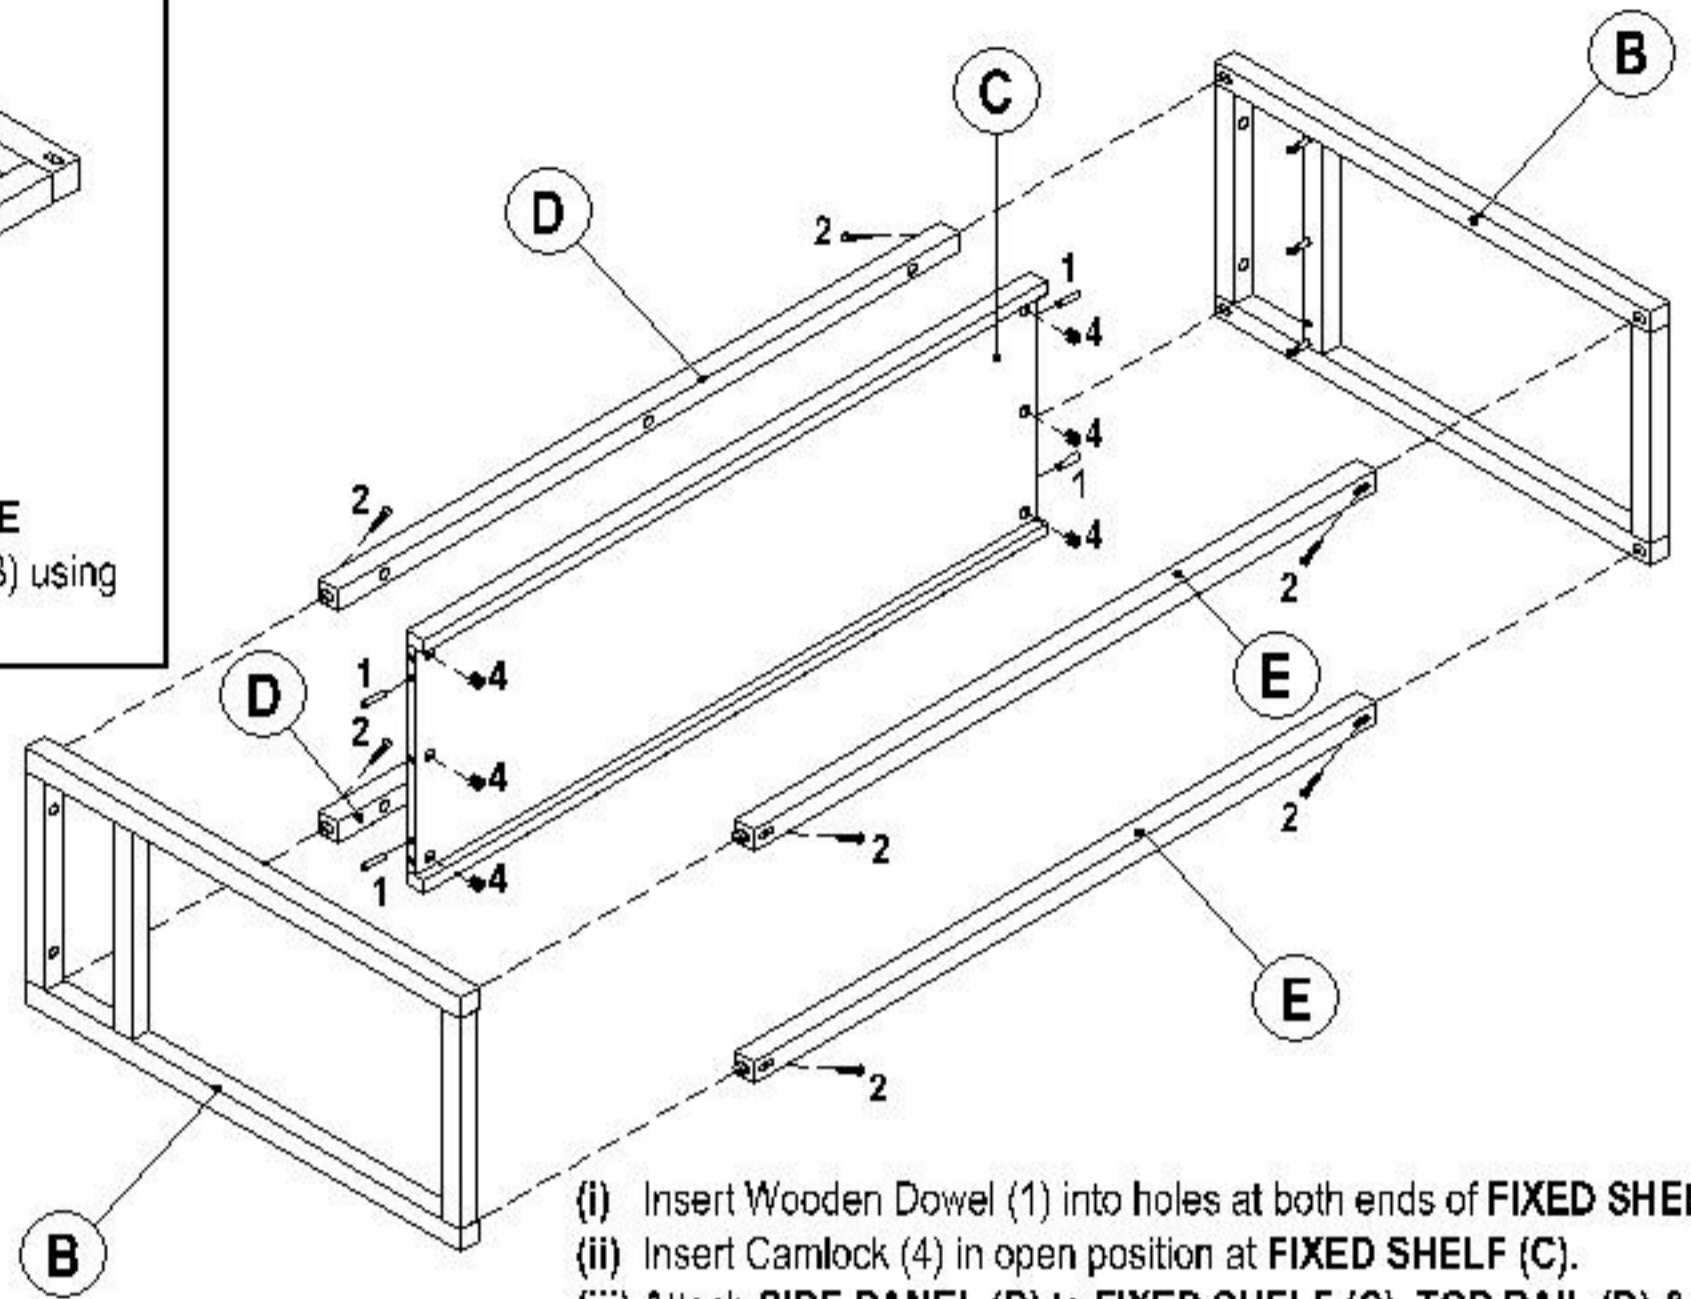

- (i) Insert Wooden Dowel (1) into holes at both ends of **FIXED SHELF (C)**.
- (ii) Insert Camlock (4) in open position at **FIXED SHELF (C)**.
- (iii) Attach **SIDE PANEL (B)** to **FIXED SHELF (C)**, **TOP RAIL (D)** & **BOTTOM RAIL (E)**.
- (iv) Tighten all Camlock (4) to close position using 4mm Hex Wrench (6).
- (v) Tighten Chipboard Screw (2) to **TOP RAIL (D)** & **BOTTOM RAIL (E)** using Philips Head Screwdriver.

**3**

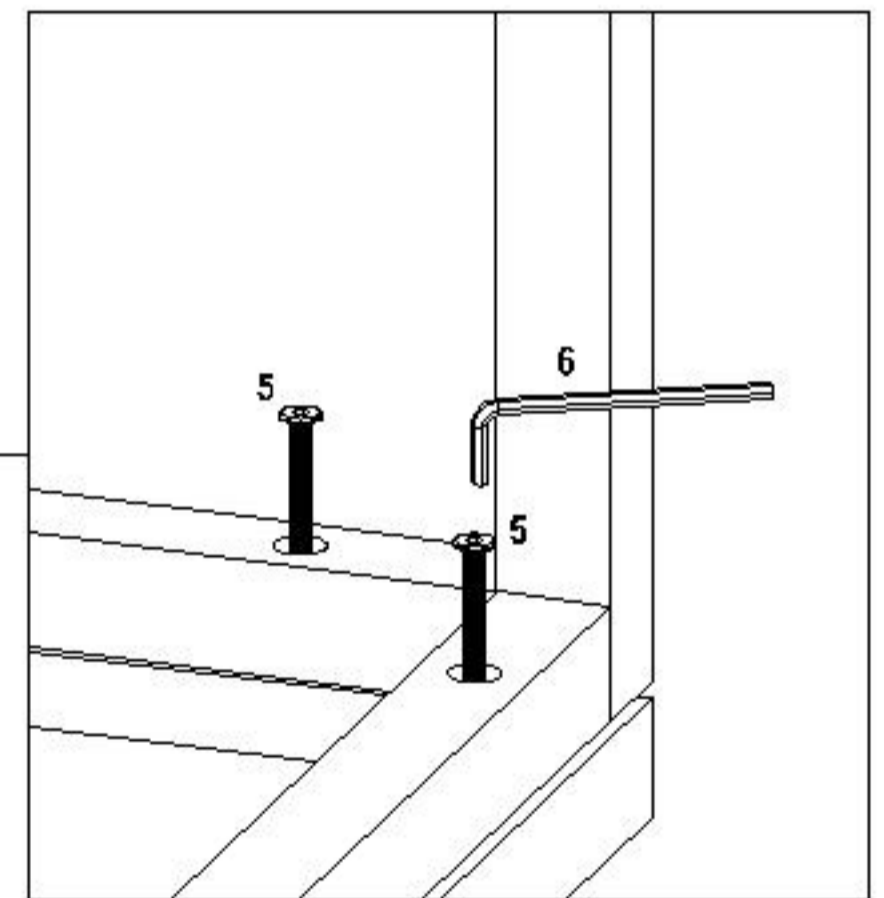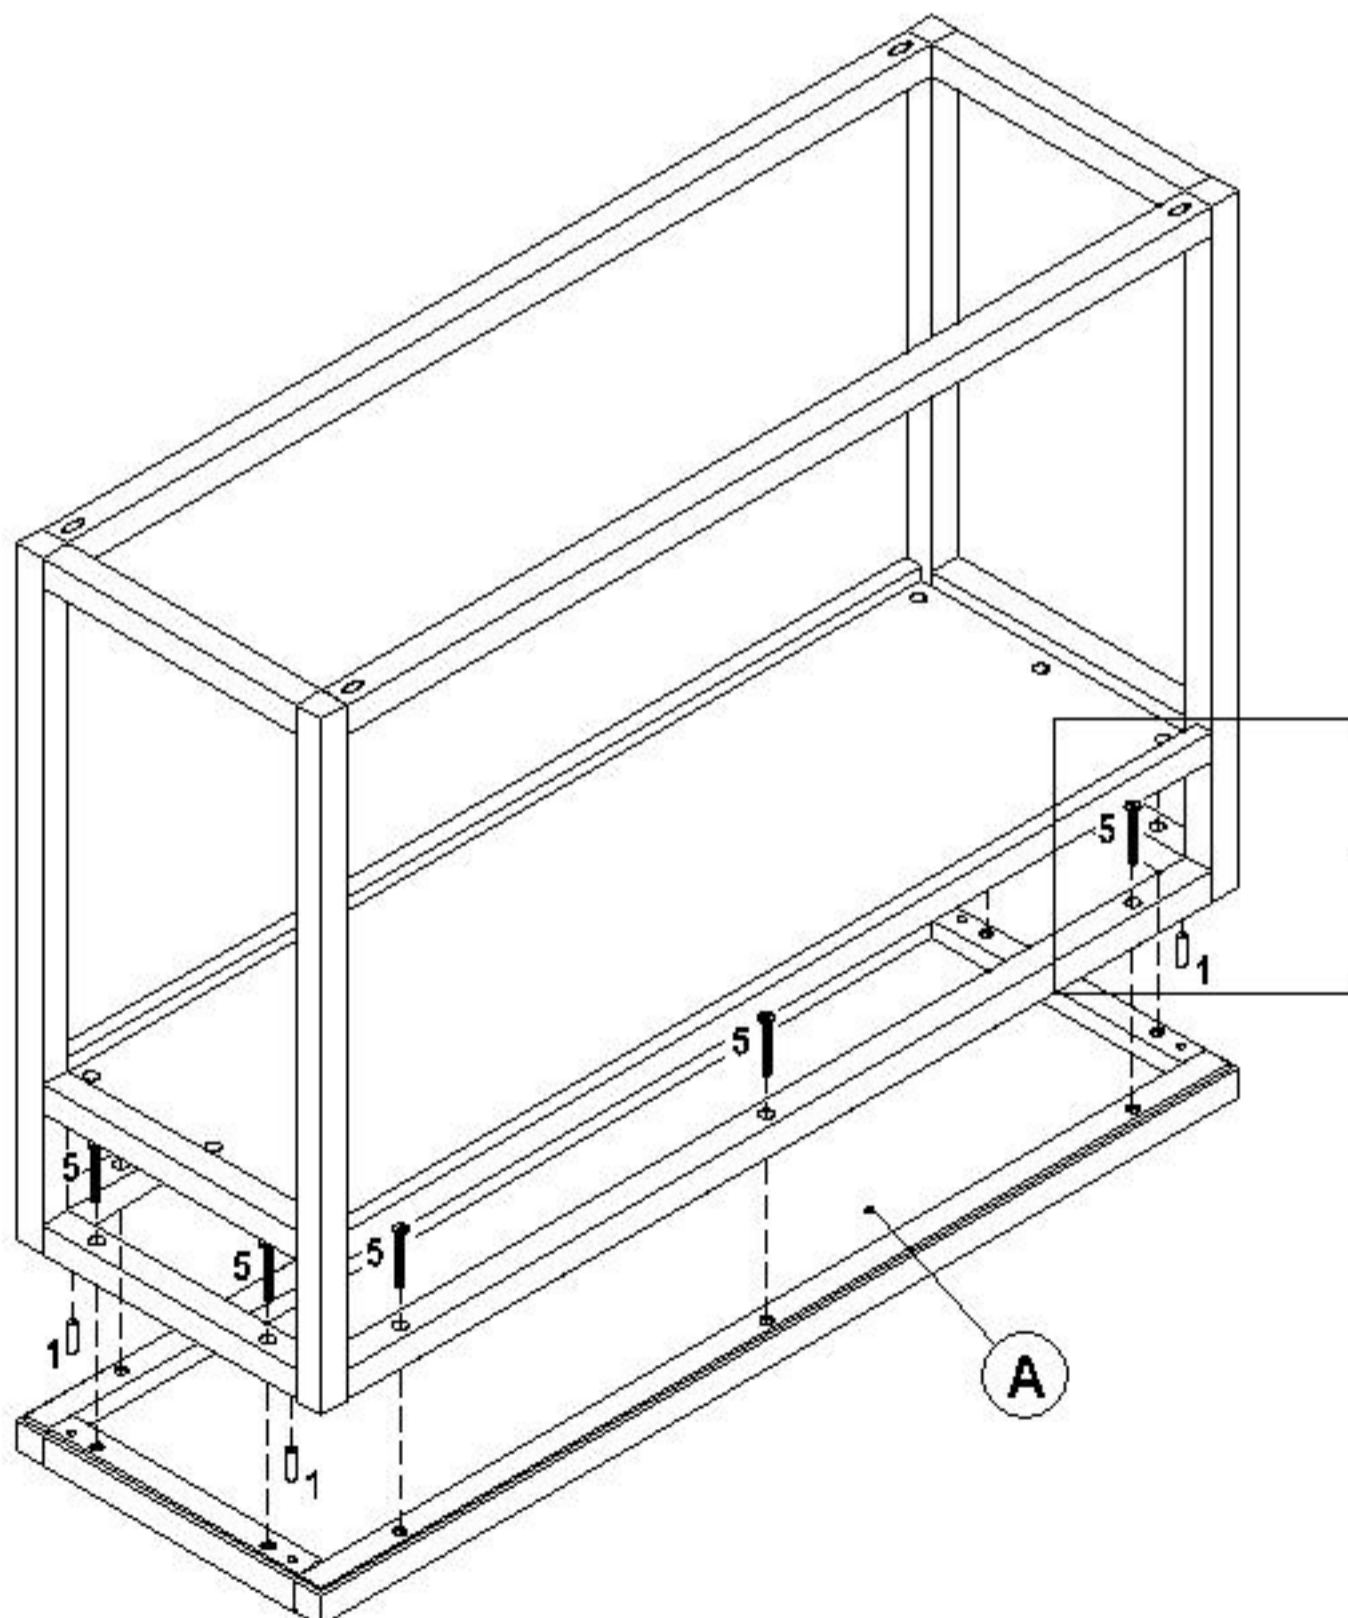

- (i) Insert Wooden Dowel (1) into holes at top of **SIDE PANEL (B)**.
- (ii) Carefully place the **TABLE TOP (A)** on a flat safe surface.  
**NOTE** : Please find a suitable surface to avoid damaging the parts.
- (iii) Attach the assembled unit to **TABLE TOP (A)** using guiding dowels.
- (iv) Insert JCBC Screw (5) into correct hole position at **SIDE PANEL (B)** & **TOP RAIL (D)**, fully tighten the screw using 4mm Hex Wrench (6).